

Double Hung




energyWall® energyWELD®
Double Hung Window



Limit Lock

Reliable Limit Lock
securing a partial
opening for safety.

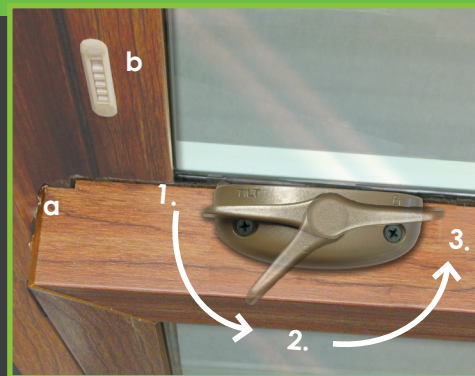

Featuring DuoTilt Lock



DuoTilt lock standard on all
EnergyWeld double hung windows

Innovative

Intuitive functionality
enables latch to operate
with a swing of the lock lever.

Streamlined

Sleek lock visuals provide
high-end appearance
and market distinction.

Performance

Latch and Lock hold hundreds
of pounds of static loading.



1. DuoTilt engaged allowing
sash to tilt in for cleaning.




2. Lever in this position unlocks the
window allowing you to open
the sash.



3. Lock engaged to ensure
secure closure.

Innergy® standard

Innergy is the innovative, energy-efficient alternative to aluminum. Rigid Thermal Reinforcements are advanced fiberglass reinforced resin inserts, designed to slide easily into window and door frame chambers for greater support and insulation.

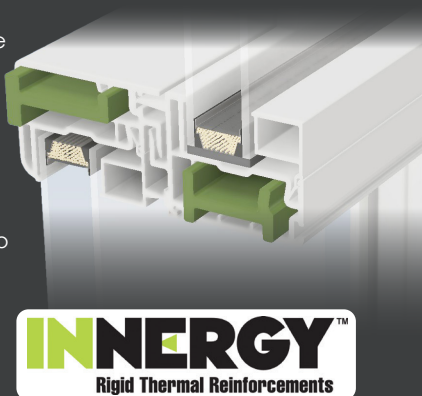

INNERGY™
Rigid Thermal Reinforcements

- **Better Thermal Performance**

Up to 700 times better than aluminum in material-to-material comparisons.

- **Better Thermal Break**

Impervious to cold or heat.

- **Better protection against condensation**

Helps prevent staining that can occur with metal reinforcements.

- **Better flexibility**

Will not permanently set when impacted.



Partner

NAMI
Certified


BLACK

Stainless Spacer standard


Stainless steel spacer features a roll formed design to provide maximum area for primary and secondary sealant coverage. It provides increased resistance to condensation and less stress on the IG seal system. No polymer content minimizes the risk of chemical fogging. Beaded molecular sieve provides initial frost points below -65°F. Desiccant assures optimum moisture adsorption while minimizing the effects of temperature-related pressure changes.



FOAM fill standard

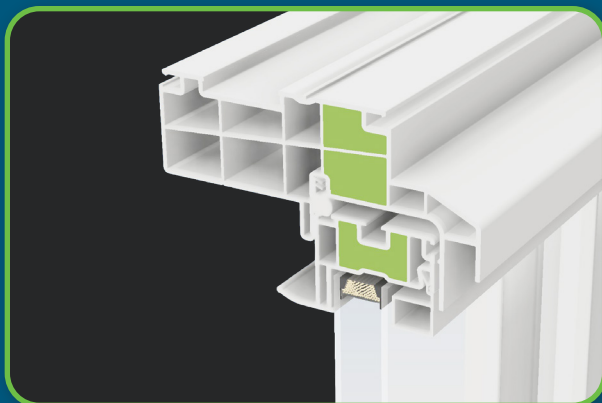

Foam Fill in Head.
Weather Stripping

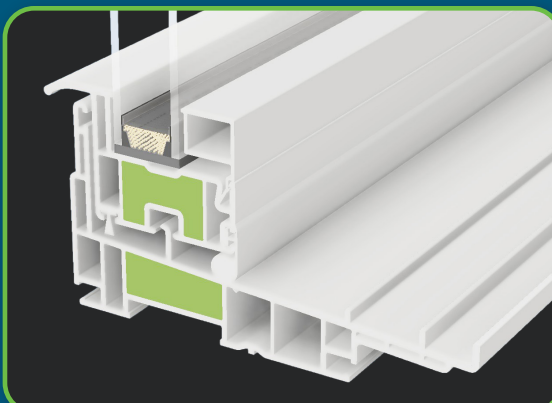

Foam Fill in Sill.
Sill Bulb
Weather Stripping
Structural Sill Interlock