




double hung



option

+ Insulating Green Foam*


Increases your energy savings.

Lowers the U-Value which increases thermal performance.

Increases the R-Value.

BLACK^{option} Stainless Spacer

Stainless steel spacer features a roll formed design to provide maximum area for primary and secondary sealant coverage. It provides increased resistance to condensation and less stress on the IG seal system. No polymer content minimizes the risk of chemical fogging. Beaded molecular sieve provides initial frost points below -65°F. Desiccant assures optimum moisture adsorption while minimizing the effects of temperature-related pressure changes.

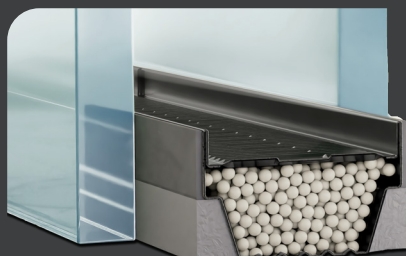


casement

Sash cranks fold into base for a clean look.

Sash opens fully with just a few turns. These windows are triple sealed against the weather and can be safely cleaned inside the home. Hinged side of sash slides away from frame when fully opened.


option

INENERGY[™]
Rigid Thermal Reinforcements

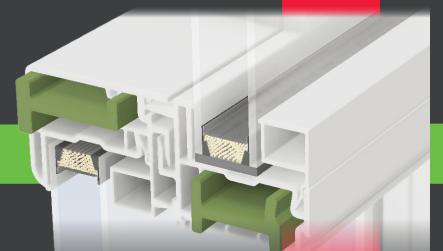

- **Better Thermal Performance**
Up to 700 times better than aluminum in material-to-material comparisons.
- **Better Thermal Break**
Impervious to cold or heat.
- **Better protection against condensation**
Helps prevent staining that can occur with metal reinforcements.
- **Better flexibility**
Will not permanently set when impacted.


energyTECH[®]+

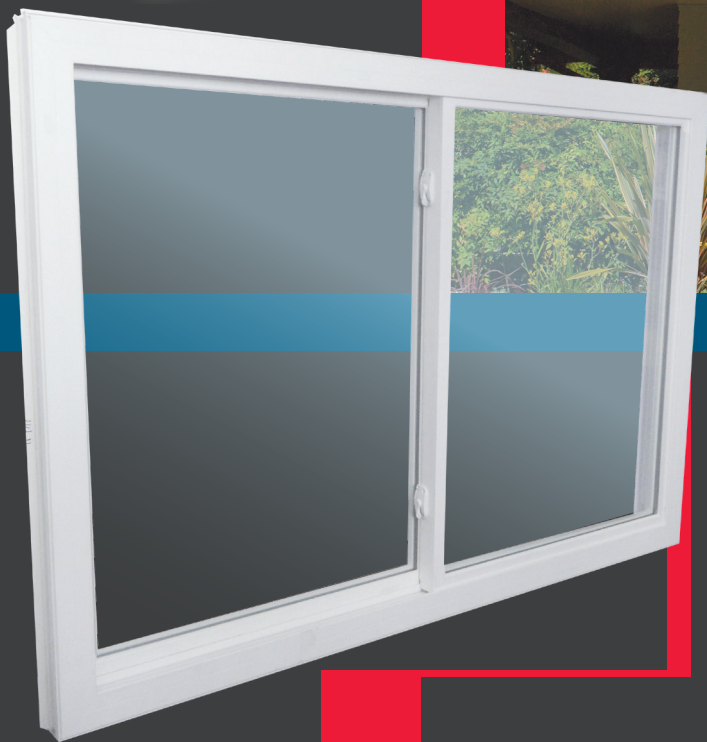

glider

Internal Blinds


options




tan




silver



gold




alabaster




white


Lock Finishes*



antique brass




satin nickel



bright brass



aged bronze



black



coppertone

NAMI
Certified



Partner



Trademarks are the property of their owners.
EnergyWall[®] USA 2024